

Technical Data Sheet

OPUS B3 Eco



1. Notes and Warnings

Attention!

This description is not a substitution for the concerned product's documentation. Please do read the documentation including the manuals carefully before dealing with this product. If the safety instructions in the documentation are not followed dangerous situation can occur that can result in damages, injuries and/or death by high voltage or wrong handling. In case you do not have the correct documentation, you can order it by contacting opus-support@topcon.com. Only properly trained personnel with the correct qualification is allowed to handle the device.

Attention!

Do not open the housing to avoid danger to high voltage. Before touching the electric assemblies make sure that the electricity is switched off completely. If the front panel is broken the device needs to be taken out of service due to risk of injury. If perceivable damages on the device exist that can compromise the functionality, it must be taken out of service due to the danger of malfunctions. These particularly include damages to the LCD display, damages to the keyboard, damages that compromise the protection level and damages to the encoder knobs.

Please note:

All content is subject to change without notice. Errors and omissions excepted.

Mounting and Handling

- Do not use the cable as a handle to carry the device.
- Mounting in clean working environment only.
- Do not mount the device under the use of violence because it can cause damage.
- The device must be mounted by trained personnel only into especially designed and tested system.
- The device may not be opened or disassembled.
- The device is to be cleaned with a moist fuzz free cotton cloth. If necessary, a mild cleaning agent may be used. Do not use acid or abrasive cleaning agents.
- The device is to be stored in a cool and dry environment and to be protected against sunshine.
- If the environmental temperature is beneath 10°C the reaction time of the display increases.

2. General Information

	OPUS B3 Eco Basic	OPUS B3 Eco Full
Order Number: CAN=C++/Projektor CDS=Codesys ISO=ISO-VT CWV=Codesys WebVisu	OPUSB3EN1CANB000 OPUSB3EN1CANT000 OPUSB3EN1CDSB000 OPUSB3EN1CDST000 OPUSB3EN1ISOT000	OPUSB3EN1CANF000 OPUSB3EN1CANA000 OPUSB3EN1CDSF000 OPUSB3EN1CDSA000 OPUSB3EN1ISOF000 OPUSB3EN1CWVF000
Dimensions	163 x 99 x 41 mm	
Weight	~540 g	
Housing	Aluminum die cast, powder coated	
Mounting	landscape or portrait standalone in-dash	

3. Display

	OPUS B3 Eco Basic	OPUS B3 Eco Full
Type:	TFT Color Graphic LCD with LED backlight	
Size:	5", 108mm (W) x 64,8mm (H)	
Resolution:	800 x 480px (WVGA), 15:9	
Colors:	16,7 Mio.	
Brightness:	typ. 800cd/m²	
Contrast Ratio:	typ. 700:1	
Optical Bonding:	yes	

4. Input Devices

	OPUS B3 Eco Basic	OPUS B3 Eco Full
Touch	PCT (only ...T000)	PCT
Keypad	N/A	
Indicators and Sensors	Light sensor 1 Multicolor LED	

5. Electronics

	OPUS B3 Eco Basic	OPUS B3 Eco Full
CPU	Freescale I.MX6® solo, 800 MHz	
Mass storage	2 GByte (minus space for OS & application)	4 GByte (minus space for OS & application)
RAM	512 MB	
EEPROM	2.816 Byte, 1.024 Byte available for user	
RTC	Buffered by gold cap Buffered for 2 weeks at T ambient Deviation: max. 1s/day	
Speaker	Up to 90 dB @10cm distance (@1 kHz) (max. @ ~8 kHz),	
Frequency range (operating)	900 Hz to 20 kHz	
Power Supply	System supplied through terminal 30 (battery +, see pinout) and 31 (battery -, see pinout). Terminal 15 (ignition) to be used to switch on/off. Operating voltage range: 8 ... 36 V DC.	

Current consumption (without external load), max

Power Mode	Current at 12 V	Current at 24 V
On	≤ 775 mA	≤ 380 mA
Low Power	230 – 775 mA	120 – 380 mA
Sleep	≤85 mA	≤50 mA
Off	≤5 mA	≤4 mA

6. Interfaces

	OPUS B3 Eco Basic	OPUS B3 Eco Full
CAN Bus	2 x CAN-Interface according to ISO 11898, CAN-specification 2.0 B active, up to 1 Mbit/s (default 250 Kbit/s, 500 Kbit/s, 750 Kbit/s, 1 Mbit/s)	
RS232	1 x RS232-Interface Type: EIA232 (only RXD, TXD, GND) Speed: max. 115.200 Kbps	
USB	Host 2.0 Side connector: 1 x Type A High speed Guaranteed 900 mA @ 5V	Host 2.0 Side connector: 1 x Type A High speed Guaranteed 900 mA @ 5V Back connector: 1 x Type A High speed Guaranteed 900 mA @ 5V
Video-Interface	N/A	1 x analog video input, 1Vss Camera control output (open drain) for special functionality (mirror, shutter, heating etc.) Camera supply output guaranteed 300 mA @ 12VDC
Ethernet Interface	N/A	1 x 10/100 Mbit/s Base T Alternative: 1 x Automotive Ethernet Interface 10/100 Mbit/s Base T1
Inputs	N/A	
Outputs	N/A	

Audio	N/A	1 x Audio output (left, right, GND) AC97 compatible Output power: approx. 50mW
Wake-Input	N/A	Input which can be used for Silent-Wake-On of the OPUS to reduce visible boot-time

7. Connectors

	OPUS B3 Eco Basic	OPUS B3 Eco Full
Main	Tyco-AMP 1437288-6 Mating connector (customer) Tyco-AMP 3-1437290-7 Mating crimp contact (customer) Tyco AMP 3-1447221-4 Dummy Plug (customer) Typo-AMP 4-1437284-3 For industrial use cable length should be less than 30m	
Video	N/A	M12 round connector, female, 5-pole, B-coded acc. to EN 61076-2-101
Ethernet	N/A	M12 round connector, female, 4-pole, D-coded acc. to EN 61076-2-101

8. Software

	OPUS B3 Eco Basic	OPUS B3 Eco Full
Operating System	Linux Kernel 6.0.0 or higher	
Application Programming	OPUS Projektor Tool CODESYS 3.x C/C++ ISO-VT	

9. Testing and Verification

CE-Compliance

EU Directive 2014/30/EU (EMC) according to:

- EN 13766-1: Earth-moving and building construction machinery - Electromagnetic compatibility (EMC) of machines with internal electrical power supply - Part 1: General EMC requirements under typical electromagnetic environmental conditions
- EN ISO 14982: Agricultural and forestry machinery - Electromagnetic compatibility - Test methods and acceptance criteria
- EN 50498: Electromagnetic compatibility (EMC). Product family standard for aftermarket electronic equipment in vehicles
- EN 61000-6-2: Electromagnetic compatibility (EMC) - Generic standards - Immunity for industrial environments
- EN 61000-6-4: Electromagnetic compatibility (EMC). Generic standards. Emission standard for industrial environments

EMC Emission radiated

30-75 MHz	62-52 ¹ dB(μV/m) – QP – 120kHz
	52-42 ¹ dB(μV/m) – AV – 120kHz
75-400 MHz	52-63 ² dB(μV/m) – QP – 120kHz
	42-53 ² dB(μV/m) – AV – 120kHz
400-1000 MHz	63 dB(μV/m) – QP – 120kHz
	53 dB(μV/m) – AV – 120kHz
1000-2500 MHz	73 dB(μV/m) – P – 120kHz
	53 dB(μV/m) – AV – 120kHz
2500-6000 MHz	80 dB(μV/m) – P – 1000kHz
	60 dB(μV/m) – AV – 1000kHz

QP: Quasi-Peak

AV: Average

P: Peak

1: Value decreases linearly with the logarithm of the frequency.

2: Value increases linearly with the logarithm of the frequency.

EMC Immunity radiated

20MHz to 800MHz with amplitude modulation 800MHz to 6GHz with pulse modulation

30V/m for the radiated field (absorber lined chamber) testing method (ISO 11452-2) in vertical and horizontal polarization

OR/AND

60mA for the Bulk Current Injection (BCI) testing method (ISO 11452-4)

EMC Emission conducted

12V-System (Maximum values) **24V-System** (Maximum values)

Positive slow pulses: +37V

Positive slow pulses: +37V

Negative slow pulses: -75V

Negative slow pulses: -150V

Positive fast pulses: +75V

Positive fast pulses: +150V

Negative fast pulses: -112V

Negative fast pulses: -150V

12 V-System

24 V- System

Test Pulse 1 Us = 112 V; FS: C

Us=-450V; FS: C

Test Pulse 2a Us=+55V; FS: B

Us=+55V; FS: B

Test Pulse 2b Us=+10V; FS: C

Us=+20V; FS: C

Test Pulse 3a Us=-165V; FS: A

Us=-220V; FS: A

Test Pulse 3b Us=+112V; FS: A

Us=+220V; FS: A

Test Pulse 4 Us₆=6V; Us=6.5 V FS: B

Us₆=6V; Us=10V FS: B

(Starting profile)

Load Dump Us=+79V; FS: C

Us=+151V; FS: C

FS: Function Status

Electrostatic Discharge

+/- 8kV contact discharge; FS: A

+/- 15kV air discharge; FS: A

EMC Susceptibility conducted

Frequency: 150kHz–80MHz; U=10V; AM: 1kHz, 80%; FS: A

Burst

$t_r=5\text{ns}$; $t_d=50\text{ns}$; Burst duration: 15ms;

Period: 300ms; $t=5\text{min}$; FS: B

Power-lines: $U_s=+/-2\text{kV}$

Signal-lines: $U_s=+/-1\text{kV}$

Surge

$t_r=1.2\mu\text{s}$; $t_d=50\mu\text{s}$; Amount: 5; Wait-time: 60s; FS: B

Power-lines: $U_s=+/-0.5\text{kV}$

E1 – Type approval

EU Directive ECE R 10

Protection Level (IP Code)

IP 66 according to ISO 20653: Road Vehicles – Degrees of protection (IP-Code) – Protection of electrical equipment against foreign objects, water and access

FCC

„This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. “

Electrical

12 and 24V-Systems according to:

Inverse Polarity resistance

5min @ -48V (no defect)

Over voltage resistance

5min @ +48V (no defect)

Start behavior

Start over Temperature

Start at TRoom; decrease in 5°steps to TMin; go to TRoom; increase in 5°steps to THigh; Start DUT at each T; Successful start expected

Short circuit strength

Connect each Pin of Main-, Video- and Ethernet-Connector for 5 Min to GND and for 5 Min to 36V; FS: C

Superimposed alternating voltage

Triangle signal, frequency sweep: 50Hz-25kHz-50Hz inside 60s; FS: A

Level	12V	24V
AC peak-to-peak U_{PP1}	1VAC	4VAC
AC peak-to-peak U_{PP2}	2VAC	4VAC
AC peak-to-peak U_{PP3}	4VAC	10VAC

De-/Increase Supply Voltage

Sweep Voltage U_{Min}-0V-U_{Min} with 0.5V/min; FS: D

Drop in Supply Voltage

12V System	24V System
U _{Start} =U _{Min} ; U _S =4.5V t _d =100ms; FS: B	U _{Start} =U _{Min} ; U _S =9V t _d =100ms; FS: B

Batteryless Operation

12V System	24V System
U ₁ =10V; U ₂ =18V; t=5min; FS: A	U ₁ =20V; U ₂ =38V; t=5min; FS: A

Mechanical

Vibration, noise

Frequency [Hz]	PSD [(m/s ²)/Hz]
10	20
20	36
30	36
141	1.64
200	1.93
300	1
2000	1

32h per Axis; FS: A

Vibration, sinusoidal

Resonance sweep

Frequency	Displacement	Acceleration
2 Hz	+/- 1 mm (2 mm PtP)	(0.016g)
10 Hz	-	2g
2000 Hz	-	2g

1 Octave/minute, 30min per resonance

Endurance Test:

Frequency	Displacement	Acceleration
10 Hz	+/- 0,75 (1.5 mm PtP)	(0.075g)
57,5 Hz	0	-
2000 Hz	-	5g

0.5 Octave/minute, 8h per axis, FS: A

Mechanical shock

Part 1: 300m/s², 18ms, 10 times per axis/direction; FS: A

Part 2: 500m/s², 11ms, 3 times per axis/direction; FS: A

Part 3: 500m/s², 6ms, 10 times per axis/direction; FS: A

Part 4: 400m/s², 6ms, 4000 times per axis/direction; FS: A

Drop Test

Drop the DUT on each side and each edge from a high of 1m on a concrete floor.

No damage or visible damage

Package Drop

Drop the DUT inside the package on each side and each edge from a high of 1m on a concrete floor.

No damage of the DUT


No cracks to the package

Climate

Salt spray resistance

Part 1: 7 cycles at 24h (8h spraying; 16h rest) salt concentration: 5%

Part 2: 4 cycles at 168h; 4 cycle:

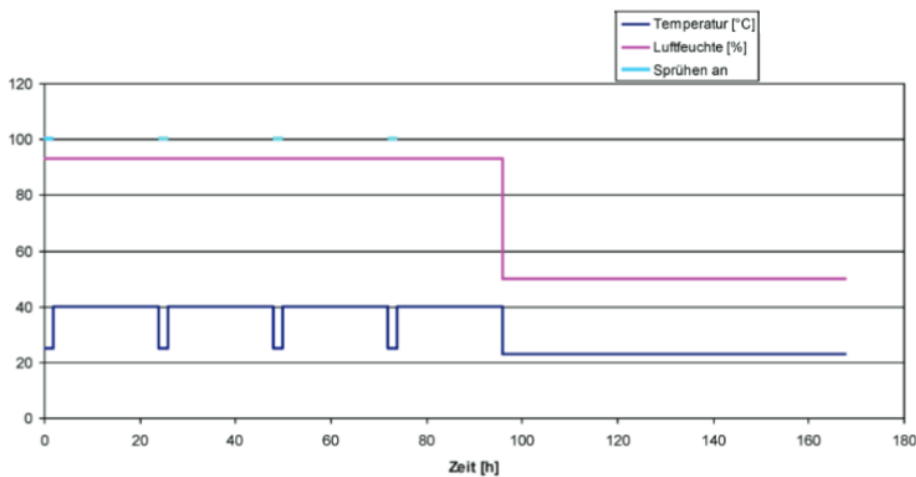

Chemical resistance

Apply once a day, for three days, the following chemicals with a brush over the exposed surface.

Inspect without rinsing immediately after-wards and after 100h. Alcohol, Antifreeze liquid (Ethyl-glycol), Diesel oil, Domestic Ammonia, Gasoline, Hydraulic oil 10W40, Liquid lime, Motor oil, NPK Chemical fertilizers 20 10 20, Windscreen cleaning mixture, Ammonium Nitrate and Ammonium Phosphate fertilizers, Bovine Effluent - (up to 5% propionic acid), Diesel fuel, STOU (Super Tractor Universal Oil) lubricating oil.

Damp heat steady

21days @+40°C and 93%r.H.; FS: C

Damp heat cyclic

6 cycles (each 24h); TLow=+25°C; THigh=+55°C

Humidity: >= 93%r.H.; FS: A

Operating temperature

24h @ -30°C; FS: A

96h @ +75°C; FS: A

Storage temperature

24h @ -40°C; FS: C

48h @ +85°C; FS: C

Temperature/Humidity cyclic

10 cycles (each 24h); TLow=-10°C; THigh=+65°C

Humidity: = 80-96%r.H or uncontrolled.; FS: A

Temperature cycling

30 cycles (each 8h); TLow=-30°C; THigh=+75°C; FS: A

Temperature shock

100 cycles (each 2h); TLow=-30°C; THigh=+75°C; Tchange: <30s; FS: C

UV resistance


Over-all time: 1500h; Cycle: 8h UV at +60°C, 4h 95%r.H.; No material damage, No visible change

10. Pinout

Main connector

OPUS B3 Eco Basic			OPUS B3 Eco Full	
Pin No.	Assignment	Description	Assignment	Description
1	VCC	supply voltage +; terminal 30	VCC	supply voltage +; terminal 30
2	Ignition Input	ignition input; terminal 15	Ignition Input	ignition input; terminal 15
3	GND	supply voltage -; terminal 31	GND	supply voltage -; terminal 31
4	n.c.	Not connected	Wake	Wake input, "Doorswitch"
5	n.c.	Not connected	Audio Out L	audio output, left channel
6	n.c.	Not connected	Audio Out R	audio output, right channel
7	n.c.	Not connected	Audio GND	audio ground
8	CAN1H	CAN 1 high	CAN1H	CAN 1 high
9	CAN1L	CAN 1 low	CAN1L	CAN 1 low
10	CAN2H	CAN 2 high	CAN2H	CAN 2 high
11	CAN2L	CAN 2 low	CAN2L	CAN 2 low
12	n.c.	Not connected	n.c.	Not connected
13	n.c.	Not connected	n.c.	Not connected
14	n.c.	Not connected	n.c.	Not connected
15	n.c.	Not connected	n.c.	Not connected
16	RS232 RxD	RS232 receive data	RS232 RxD	RS232 receive data
17	RS232 TxD	RS232 transmit data	RS232 TxD	RS232 transmit data
18	RS232 GND	RS232 GND	RS232 GND	RS232 GND
19	n.c.	Not connected	n.c.	Not connected
20	n.c.	Not connected	n.c.	Not connected
21	n.c.	Not connected	n.c.	Not connected
22	n.c.	Not connected	n.c.	Not connected
23	SERV_EN	service enable	SERV_EN	service enable
24	VCC	Not connected	VCC	Not connected
25	Ignition Input	Not connected	Ignition Input	Not connected
26	GND	Not connected	GND	Not connected


View on the rear side of the B3

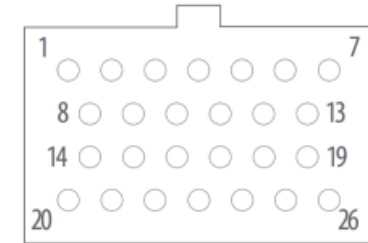

OPUS displays in the industrial sector are only intended to be used with cable length less than 30 meters.

Video connector

Pin No.	Assignment
1	VidSig +
2	Switch
3	Power 12 V
4	Power GND
5	VidSig GND




Video- Connector, M12, female, 5 pins, b-coded

Ethernet connector

Industrial Ethernet

Pin No.	Assignment
1	TD+
2	RD+
3	TD-
4	RD-



Ethernet Connector, M12, female, 4 pins, d-coded

Automotive Ethernet

Pin No.	Assignment
1	D+
2	n.c.
3	D-
4	n.c.

